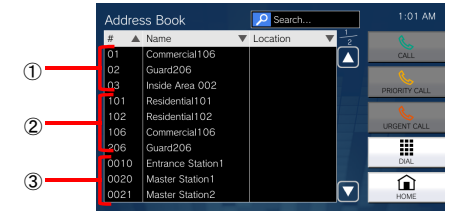


Summary of differences between IX and IXG systems

When using IX-MV7-* on IXG systems, some features are restricted. In addition, some functions are not available. The following table summarizes the functions and restrictions when using IX-MV7-* on IX and IXG systems.

Conventions

- : This function is available on IX and IXG systems.
- △: Some restrictions apply to IXG systems.
- ×: This function cannot be used on IXG systems.

Large title	Small title	Page	IX System	IXG System	NOTES																				
Overall	"Location"	-	○	×	IXG System: "Location" information is not displayed.																				
	"VoIP Phone"	-	○	×	IXG system: "VoIP Phone" is not available.																				
	Station Programming (WEB)	-	○	×	IXG System: Stations cannot be configured using a web browser.																				
Before Using	Part Names	10-11	○	○																					
	Status Indicators	12-13	○	△	IXG System: Since "Device Check" is not used, the status indicator does not flash when the Device Check has an error.																				
	Camera View Range and Mounting Position	14	○	○																					
	User Interface	15-20	○	△	IXG system: "Device Check" in "Status" is not used.																				
	Entering Text	21	○	○																					
	Answering a call	22-25	○	○																					
	Setting the date and time	26-27	○	○																					
	About microSD card	28	○	△	IXG-System: Since "Device Check" is not used, the Device Check results are not saved in microSD card.																				
	Inserting/Removing microSD Cards	29-30	○	○																					
How to use	Selecting / Choosing / Calling by Number	31	○	○																					
	Specify a station or group using the address book	32	○	○	IXG system: The call destination is as follows. <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3">Display address book</th> <th>Call Destination</th> </tr> <tr> <th>#</th> <th>Name</th> <th>Location</th> <th></th> </tr> </thead> <tbody> <tr> <td>① Group Number (2 digits)</td> <td>Group Name</td> <td></td> <td>Call Stations that is registered in a specific group and Mobile App (one Unit) simultaneously</td> </tr> <tr> <td>② Unit Number (3-32 digits)</td> <td>Unit Name</td> <td></td> <td>Call Mobile App only that is registered in a specific Unit simultaneously</td> </tr> <tr> <td>③ Station Number (3-32 digits)</td> <td>Station Name</td> <td></td> <td>Call a specific station</td> </tr> </tbody> </table> 	Display address book			Call Destination	#	Name	Location		① Group Number (2 digits)	Group Name		Call Stations that is registered in a specific group and Mobile App (one Unit) simultaneously	② Unit Number (3-32 digits)	Unit Name		Call Mobile App only that is registered in a specific Unit simultaneously	③ Station Number (3-32 digits)	Station Name		Call a specific station
	Display address book			Call Destination																					
	#	Name	Location																						
	① Group Number (2 digits)	Group Name		Call Stations that is registered in a specific group and Mobile App (one Unit) simultaneously																					
	② Unit Number (3-32 digits)	Unit Name		Call Mobile App only that is registered in a specific Unit simultaneously																					
	③ Station Number (3-32 digits)	Station Name		Call a specific station																					
	Searching for stations	33	○	○																					
	Reviewing Call History	34	○	○																					
	History Screen	35	○	△	IXG System: The "Latch" icon is not displayed because the Bathroom Call and strobe light association are not used.																				
	Placing a Call	36-37	○	○																					
	Calling a Group	38-39	○	○																					
	Use an external device to place a call	40-41	○	○																					
	Answering a call	42-43	○	△	IXG System: Bathroom Call is not received because IXW-MA and IX-SPMIC is not be able to use with IXG system. The IX-SS-2G and IX-RS-* cannot be configured with IXG system.																				
	Paging a group	44-45	○	○																					
	Paging all stations	46-47	○	○																					
	Message Paging a group	48-50	○	○																					
	Message Paging all stations	51-53	○	○																					
	Contact Input Page	54	○	×																					
	Receiving a page	55-56	○	△	IXG systems: [Talk icon] (Talk) is not displayed when a page is received. "Answering pages" is not available.																				
	Monitoring a door station	57-58	○	○																					
	Scan Monitoring	59-60	○	○																					
	Using Speed Dial Buttons	61	○	○																					
	Viewing Recordings	62-63	○	○																					
	Understanding the Playback Screen	64	○	○																					
	Play Video/Audio Recordings using a PC	65	○	○																					
	Transfer calls (during communication)	66-68	○	○																					
	Absent Transfer	69-70	○	○																					
	Other Transfer Options	71	○	○																					
	Unlocking a door	72-73	○	○																					
	Placing a call on hold	74	○	○																					
	Selecting a station to answer	75-76	○	○																					
	Recording Video / Audio	77	○	○																					
	Fixing the Capture Area	78	○	○																					
	Adjusting video to enhance visibility	79	○	○																					
	Adjusting Screen Brightness	80	○	○																					
	Adjusting speaker volume	81	○	○																					
	Adjusting microphone volume	82	○	○																					
	Adjusting Ringtone Volume	83	○	○																					
	Using Line Supervision	84-85	○	○																					
	Performing Device Check	86-87	○	×	IXG system: "Device Check" is not used.																				
	Confirming Station Information	88-89	○	○																					
	Configuring the station sound a tone on a schedule	90	○	○																					
	Playing the Communication Audio Messages automatically	91	○	×	IXG system: "Communication Audio Messages" is not used.																				
	Sending an email	92	○	○																					
	Settings and Adjustments	Settings	93	○	△	See each section below.																			
		Before Configuring the Station	101-102	○	○																				
Station Settings		103-105	○	○																					
Call Settings		106-114	○	○																					
Communication Settings		115	○	○																					
Transfer Settings		116-126	○	△	IXG system: When configuring a Entrance Station or Door Station as a transfer destination, configure only a single Entrance Station or Door Station. If multiple stations are configured, calls will not be transferred to the Entrance Station or Door Station. For the unit to which the Mobile App belongs, register only one unit. Even if multiple entries are registered, only the unit registered last in the transfer destination list is forwarded.																				
Paging Settings		127	○	○																					
Monitor Settings		128-129	○	○																					
Record Settings		130-131	○	○																					
Chime Settings		132-137	○	○																					
Relay Output Settings (administrator privileges only)		138-145	○	○																					
Volume Settings		146-147	○	○																					
Speed Dial Settings		148-158	○	△	IXG system: Store only IX stations (e.g. Door Station, Master Station) in "Set Destination" of "Relay Control". Setting other than IX station (e.g. Entrance Station, Tenant Station) has no control.																				
Supervision Settings (administrator privileges only)		159-160	○	×	IXG system: "Supervision" is not used.																				
Factory Reset		161-162	○	○																					